


# Zirkona Dashboard Mount

Art. no. 201041

## Note!



Always apply thread lockers on 20 mm threads. Use Loctite or equivalent.


Mounting plate that is mounted on the top frame of the dashboard.  
Fits Volvo's new cab FM / FH from year 2012. Suitable starting bracket for Zirkona Shelf, Joiner system and Zirkona Robust.

1



Dismantle and remove the instrument panel in the center to lay off the top frame of the dashboard center.


2

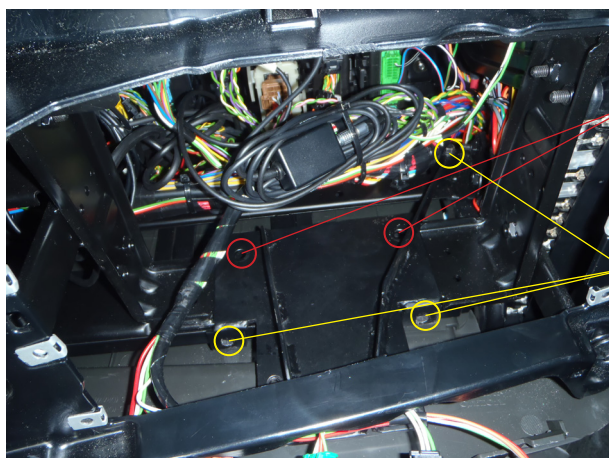

Position the clamp mounts (two pieces) and put the bracket in place. *Note* the fastening points (2) for the clamp mounts.

*Note* the screw fastening points (3). Place the bracket fixed to the fastening points. Use standard screws that are already located on the mounting points.

3

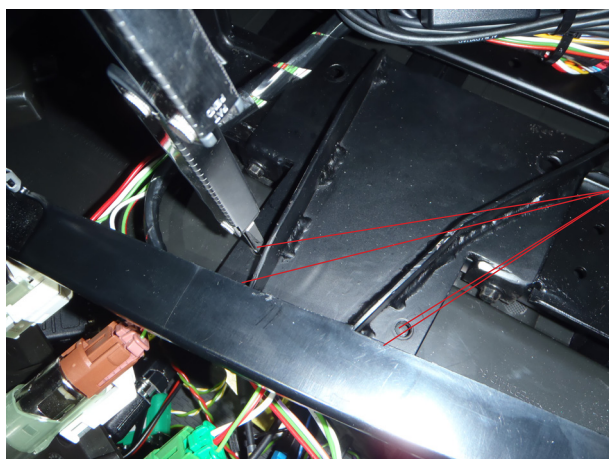

Make a mark in the plastic for spacers (4 holes). The spacers must pass through the plastic to secure the bracket which extends the mount and makes it visible for final assembly.

Continuation on page two...

**zirkona**  
www.zirkona.com

Zirkona Sweden AB assumes no responsibility for the installation or use of the product. All responsibility rests with the user.


# continued Zirkona Dashboard Mount

Art. no. 201041


**OBS!**




Always apply thread lockers on 20 mm threads. Use Loctite or equivalent.

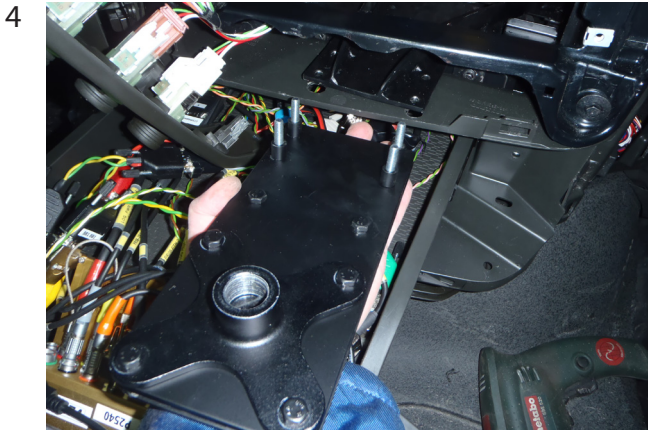

Attach the extension bracket in Zirkona Dashboard Mount with spacers.

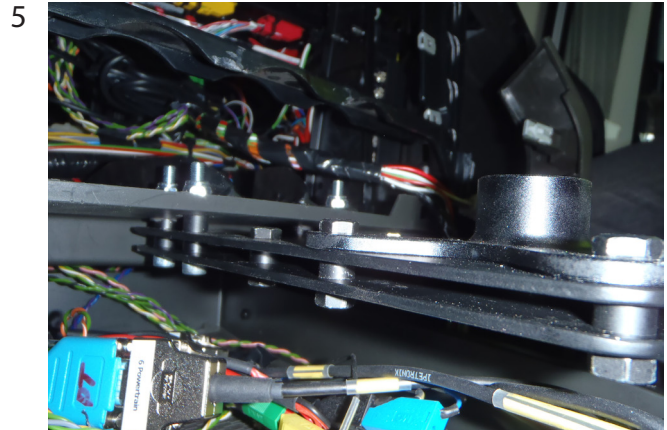

The bracket with the extension in place.

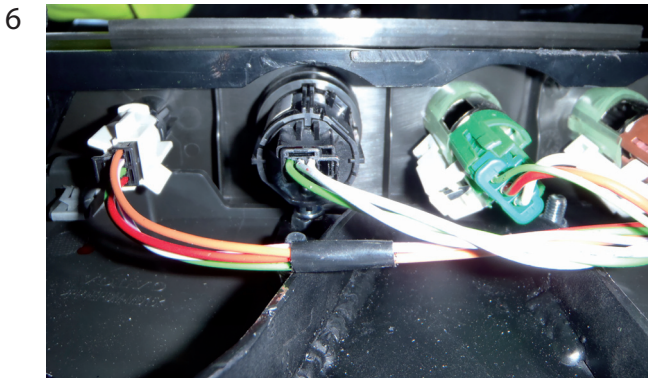

It is important to protect the cables so that they do not rub against the bracket.



Reassemble the instrumentation in the middle. Then attach the selected data brackets.

**zirkona**  
www.zirkona.com